





VIEW WIRELESS


CATALOGUE ENGLISH

VIEW 
IoT smart life



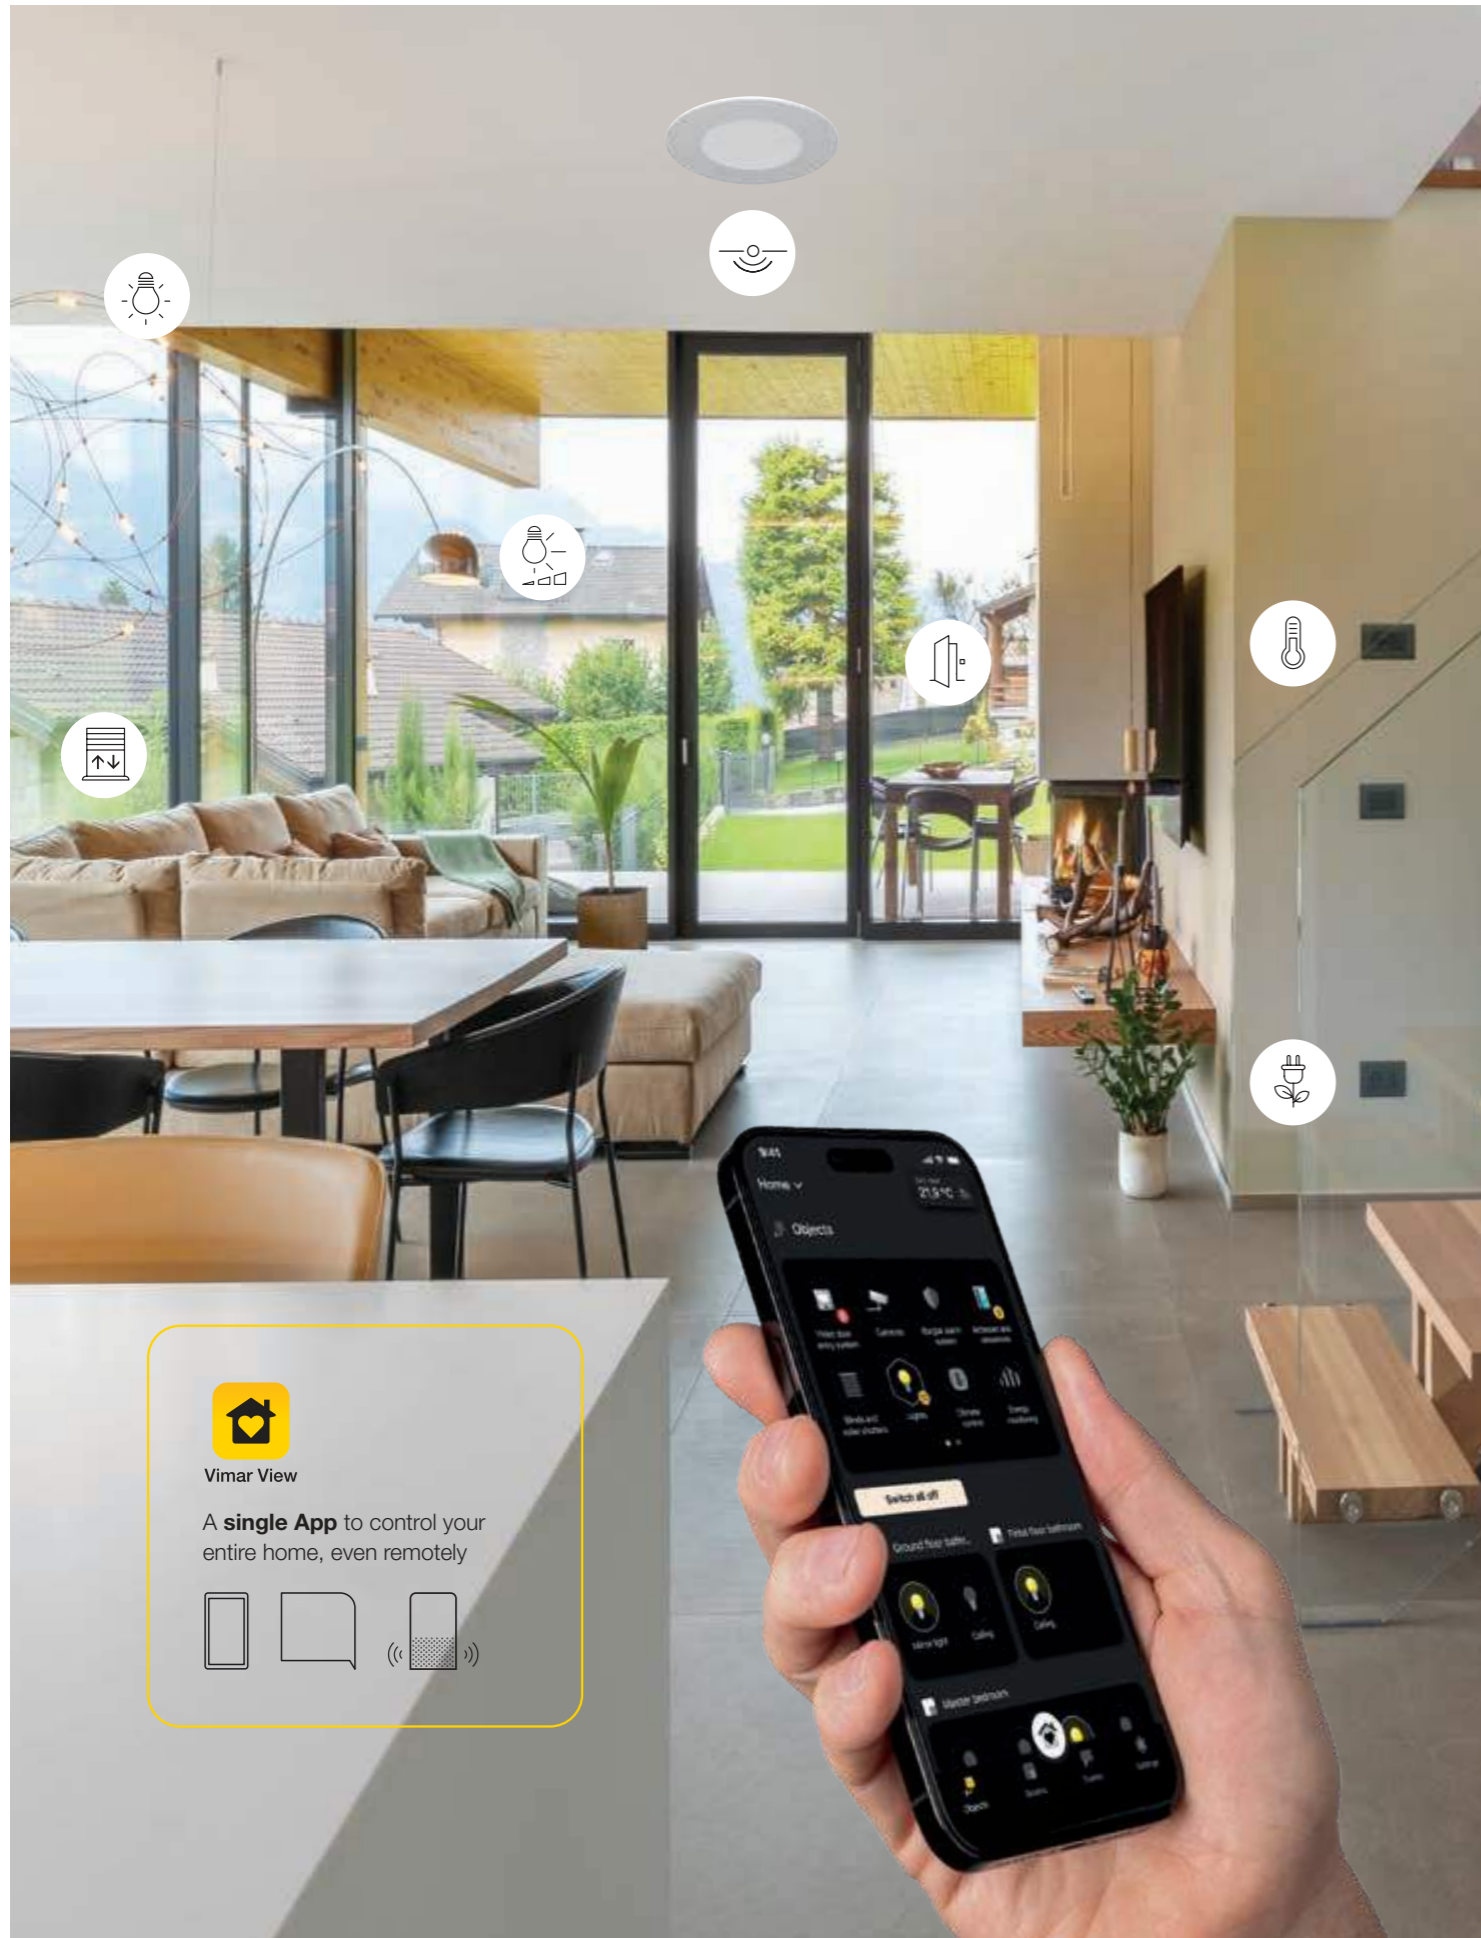



Vimar View
 A **single App** to control your entire home, even remotely



View Wireless **Smart Home:**
 make **your system** connected.



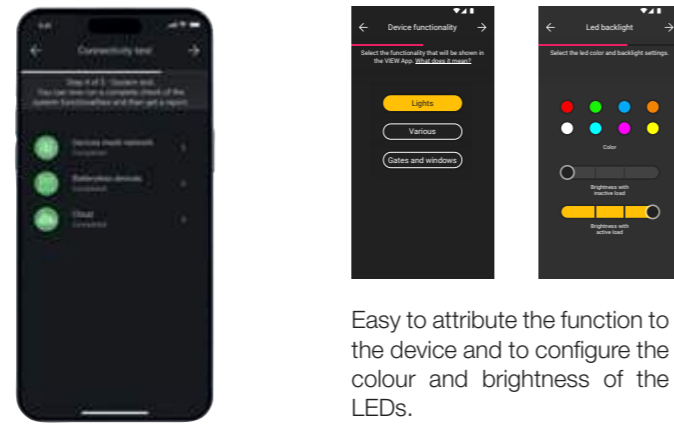

Easy to attribute the function to the device and to configure the colour and brightness of the LEDs.



Bluetooth zigbee

Bluetooth zigbee



Bluetooth

Bluetooth

INSTALLATION **Bluetooth®**

Works with **Apple HomeKit**

Hey Google **Works with IFTTT**

So thanks to the Wi-Fi gateway, the Bluetooth® Mesh network and the Vimar View App, you can therefore:

- remote control lights, roller shutters, energy consumption, temperature and accesses, and expand the system even with battery-free controls, which can be positioned freely throughout your home;
- control a socket outlet and measure the consumption of the connected load, receiving a notification if the threshold is exceeded;
- create scenarios and routines;
- control the system using voice controls (Amazon Alexa, Google Assistant and Siri).

INSTALLATION **zigbee**

Works with **Samsung SmartThings**

The View Wireless configuration App can be used to:


- change the protocol in favour of Zigbee, enabling the direct integration of devices with the Zigbee hub
- manage a smart basic ecosystem to control lights, roller shutters, temperature and energy management.

New functions for even more comprehensive climate control.

New!

Smart thermostat and thermostatic heads

The View Wireless system is expanding with important new features, particularly **concerning temperature control**. **The new connected thermostats, thermostatic heads, actuators and module** in fact also allow for remote temperature control, making it possible to turn the majority of systems - composed of radiators, underfloor heating or fan coils - into connected systems.

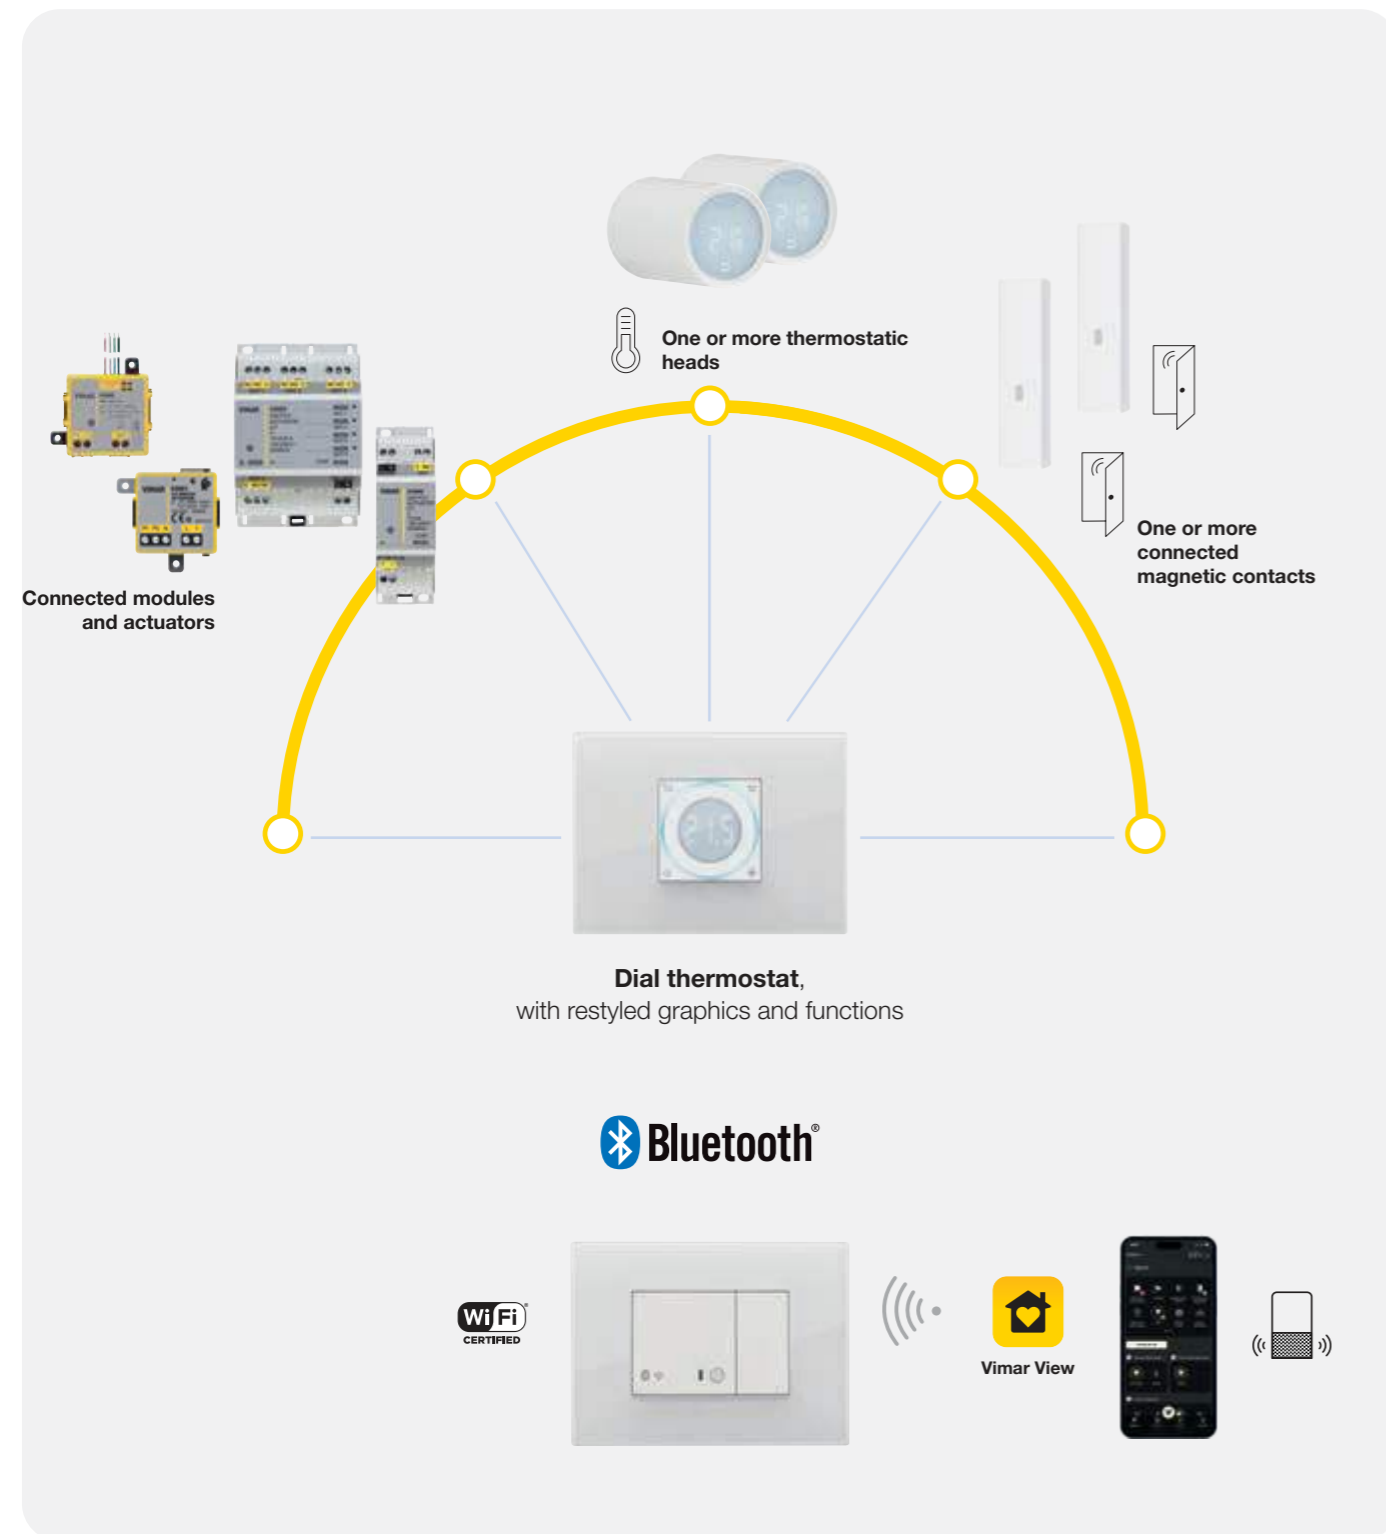


New opportunities for temperature control.



APPLICATIONS

Lighting management.
Widespread comfort.

With lighting management devices, you can **control the lights in every room** and **throughout the building based on the time of day**: you can **turn all the lights on and off simultaneously**, and **adjust the intensity, always creating the right atmosphere** in various settings. With a smart system, you can control all the motorised blinds and roller shutters in the building: save your favourite positions and raise or lower them at specific times according to sunlight for conscious energy management.

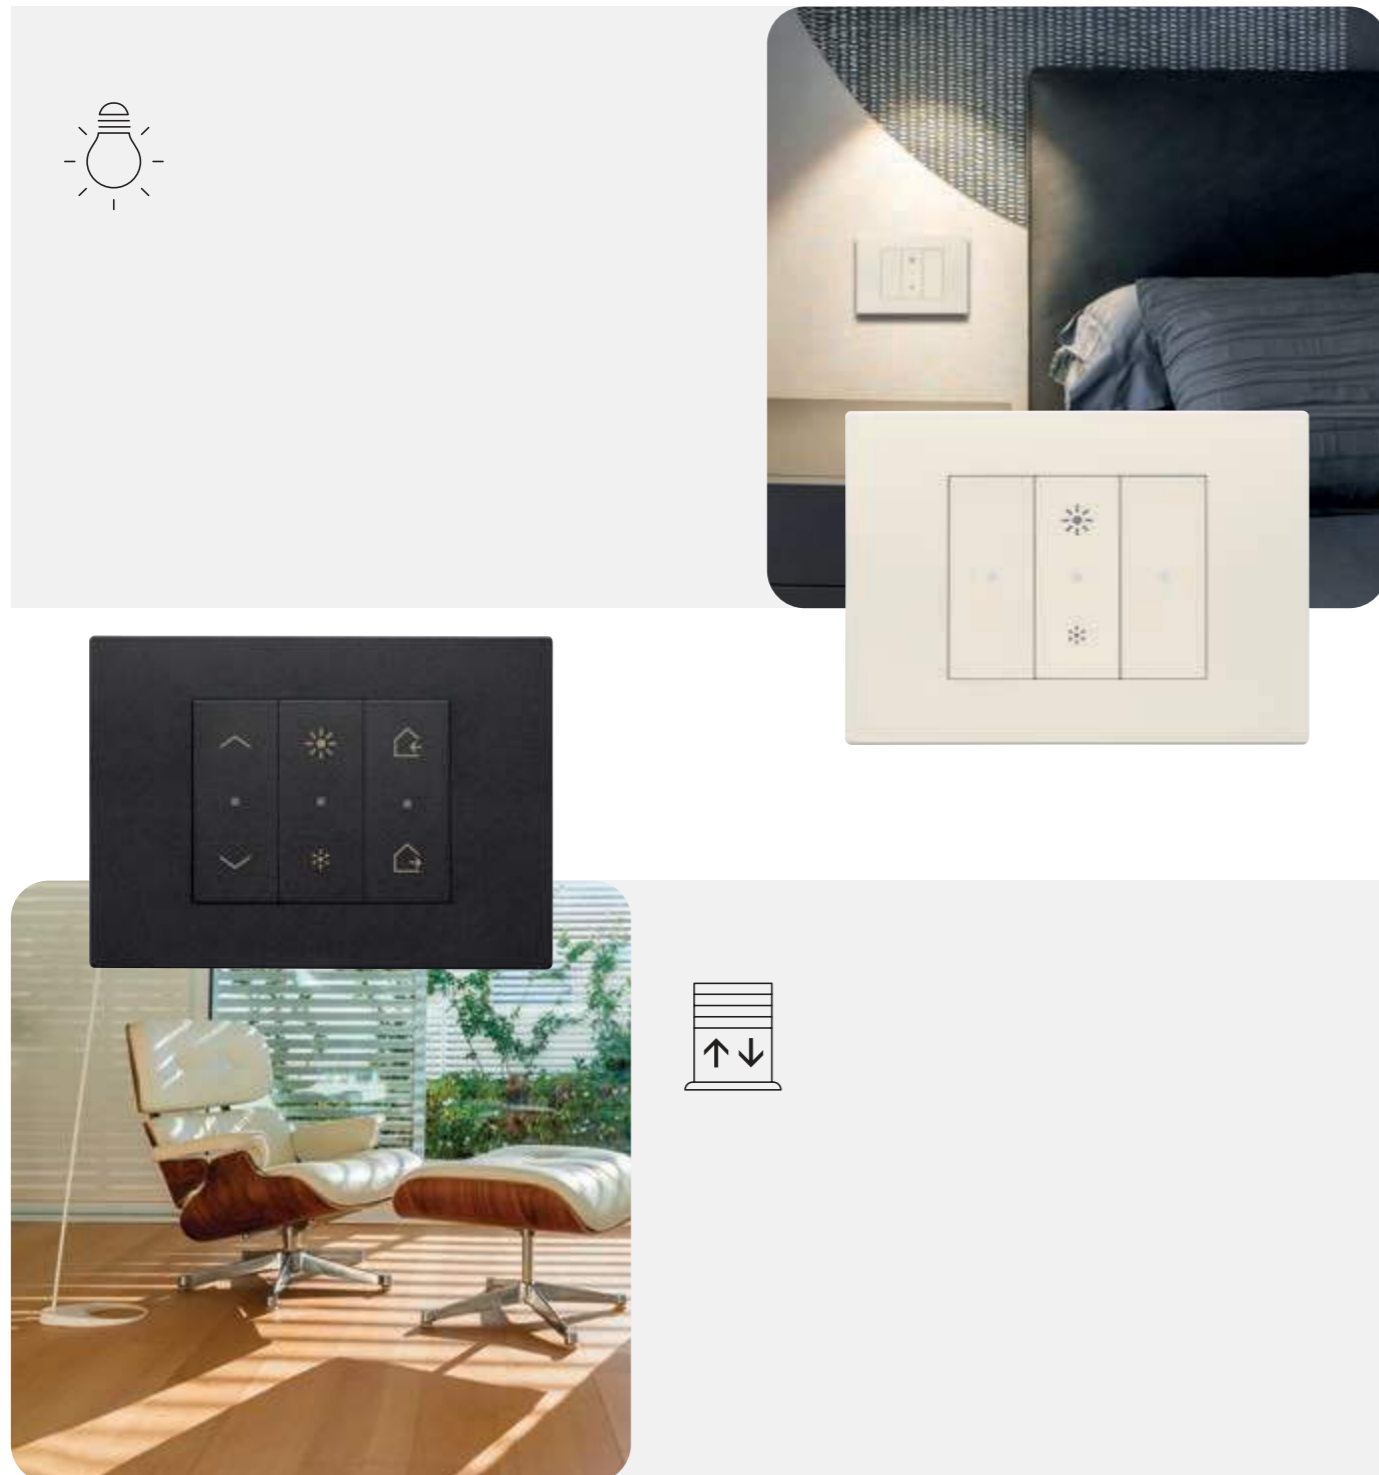

APPLICATIONS

Energy management.
For conscious consumption.


Smart thermostats **provide heating control and climate control for maximum comfort throughout your home**, as well as to avoid energy wastage. What's more, thanks to Vimar connected devices and the Vimar View App, **you can manage every single appliance and avoid black-outs** by making simple adjustments for conscious energy consumption. **From your smartphone, you can easily check the electricity consumption of your home, office or accommodation facility**;



APPLICATIONS

Presence and access control.
Technology available to everyone.


A smart building is safer, and Vimar solutions **can be expanded over time based on the needs of the environment.** It's easy to integrate access management for hotels and offices, offering a user-friendly remote experience via tablet and smartphone through the View App, so you can always have every environment under supervision.

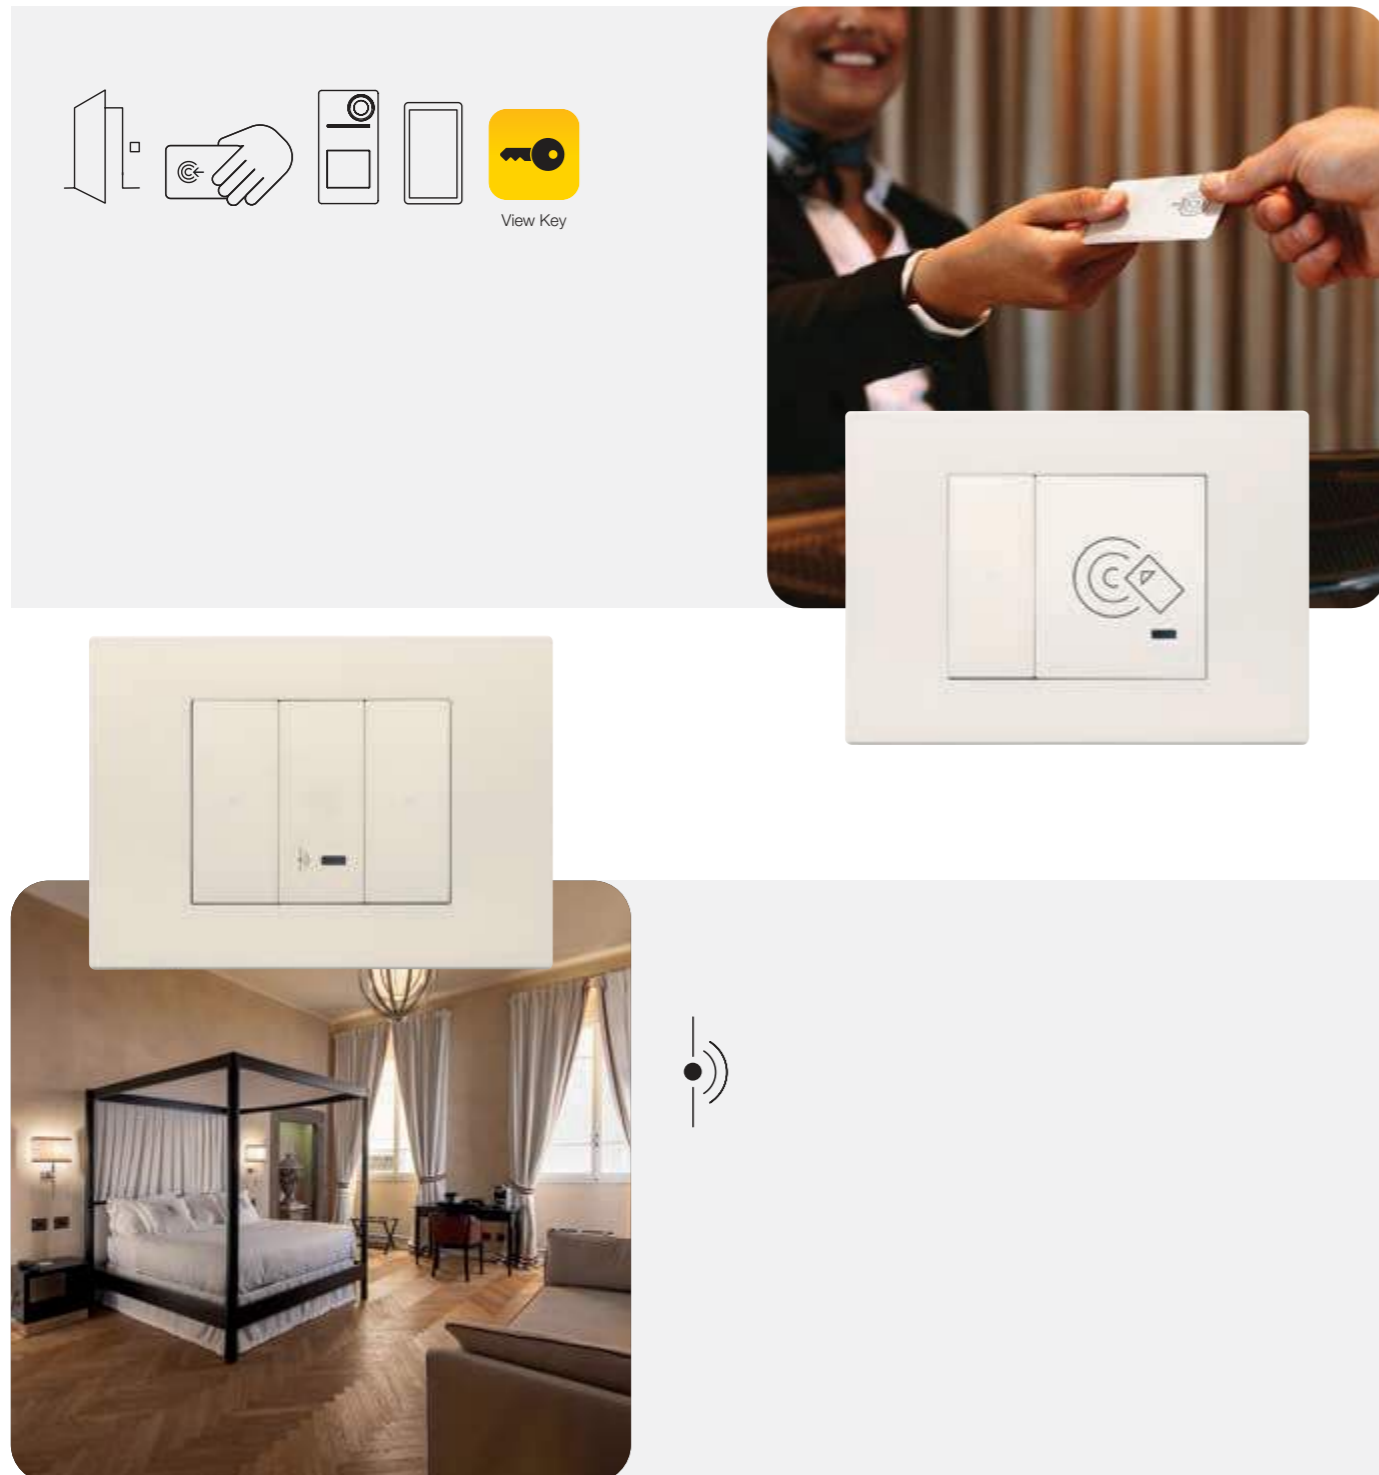


APPLICATIONS



Scenario management.
For a connected, safe and sustainable building.

The View Wireless system **offers the possibility of implementing up to 16 configurable scenarios,** allowing you to customise and automate the functions within an environment. This flexibility makes it possible to optimise comfort and energy efficiency, adapting the system to the customer's specific needs.

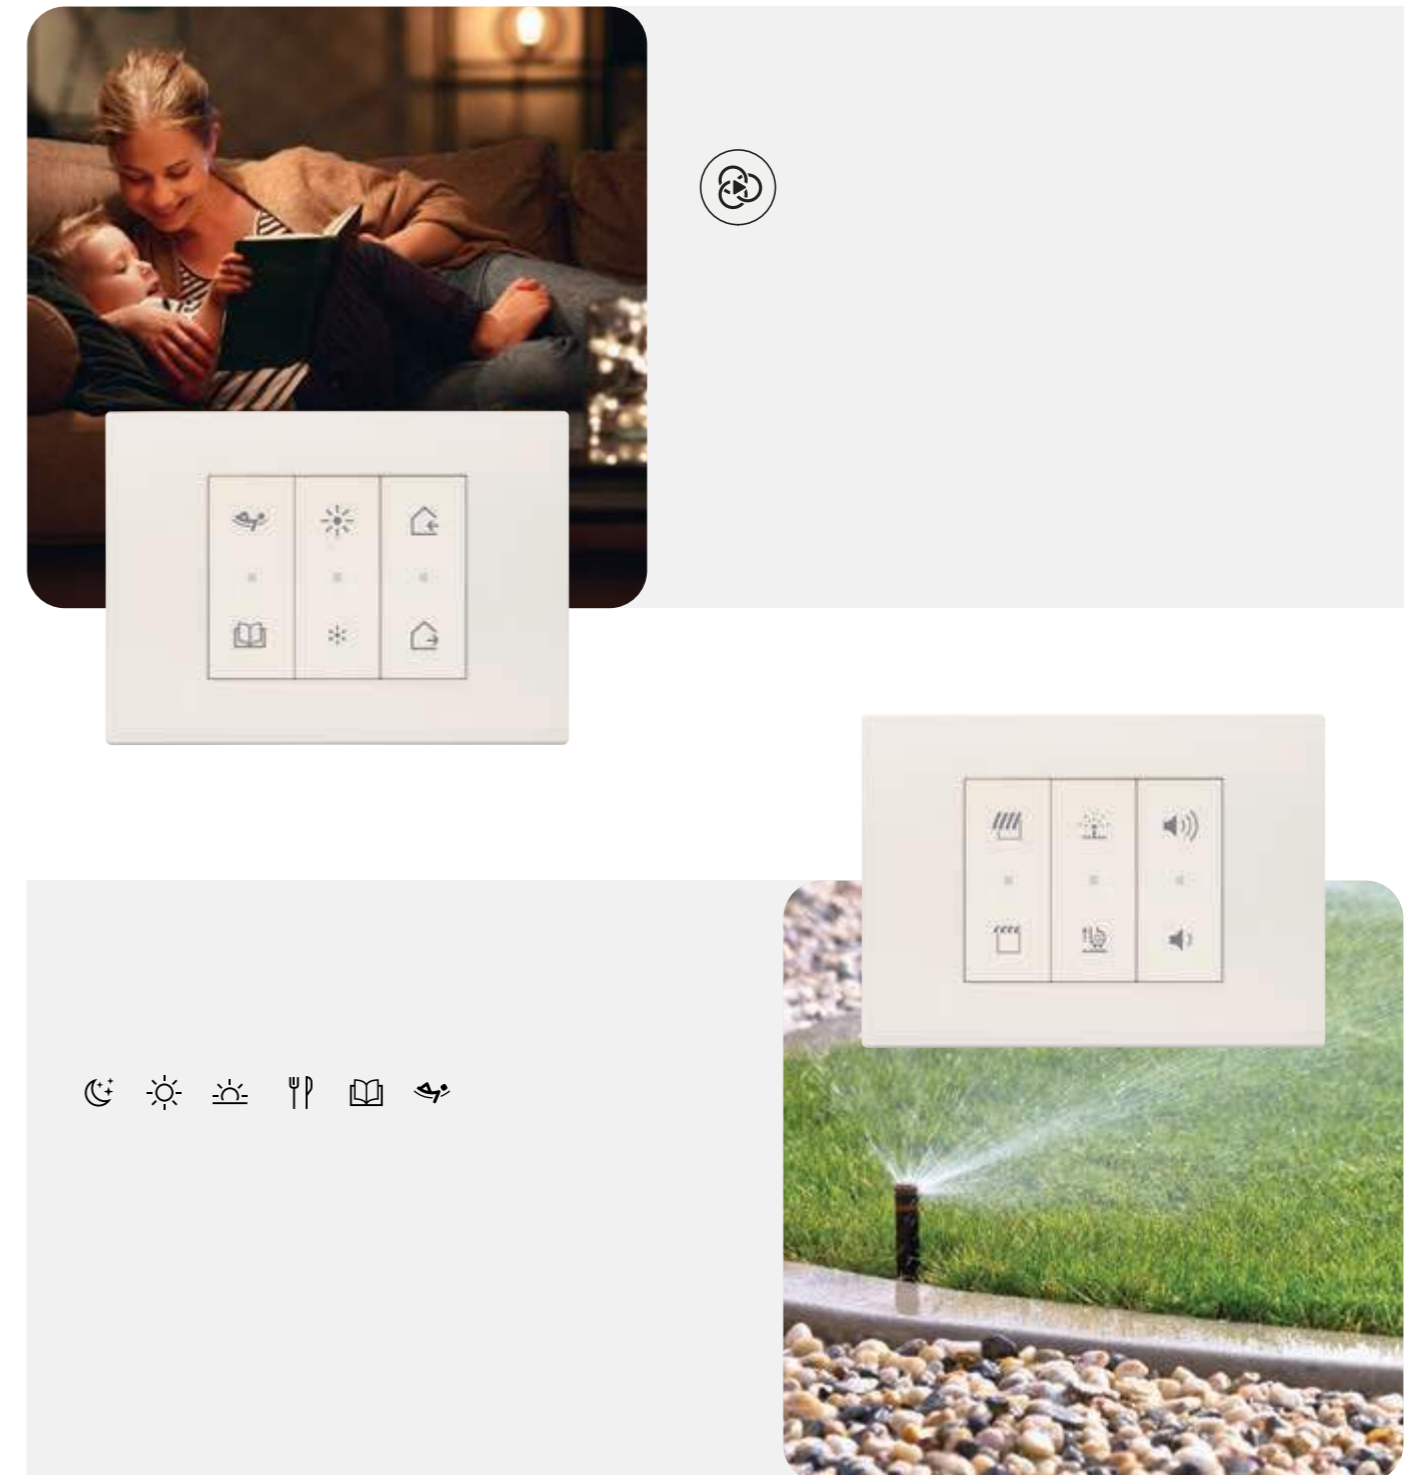



Vimar View

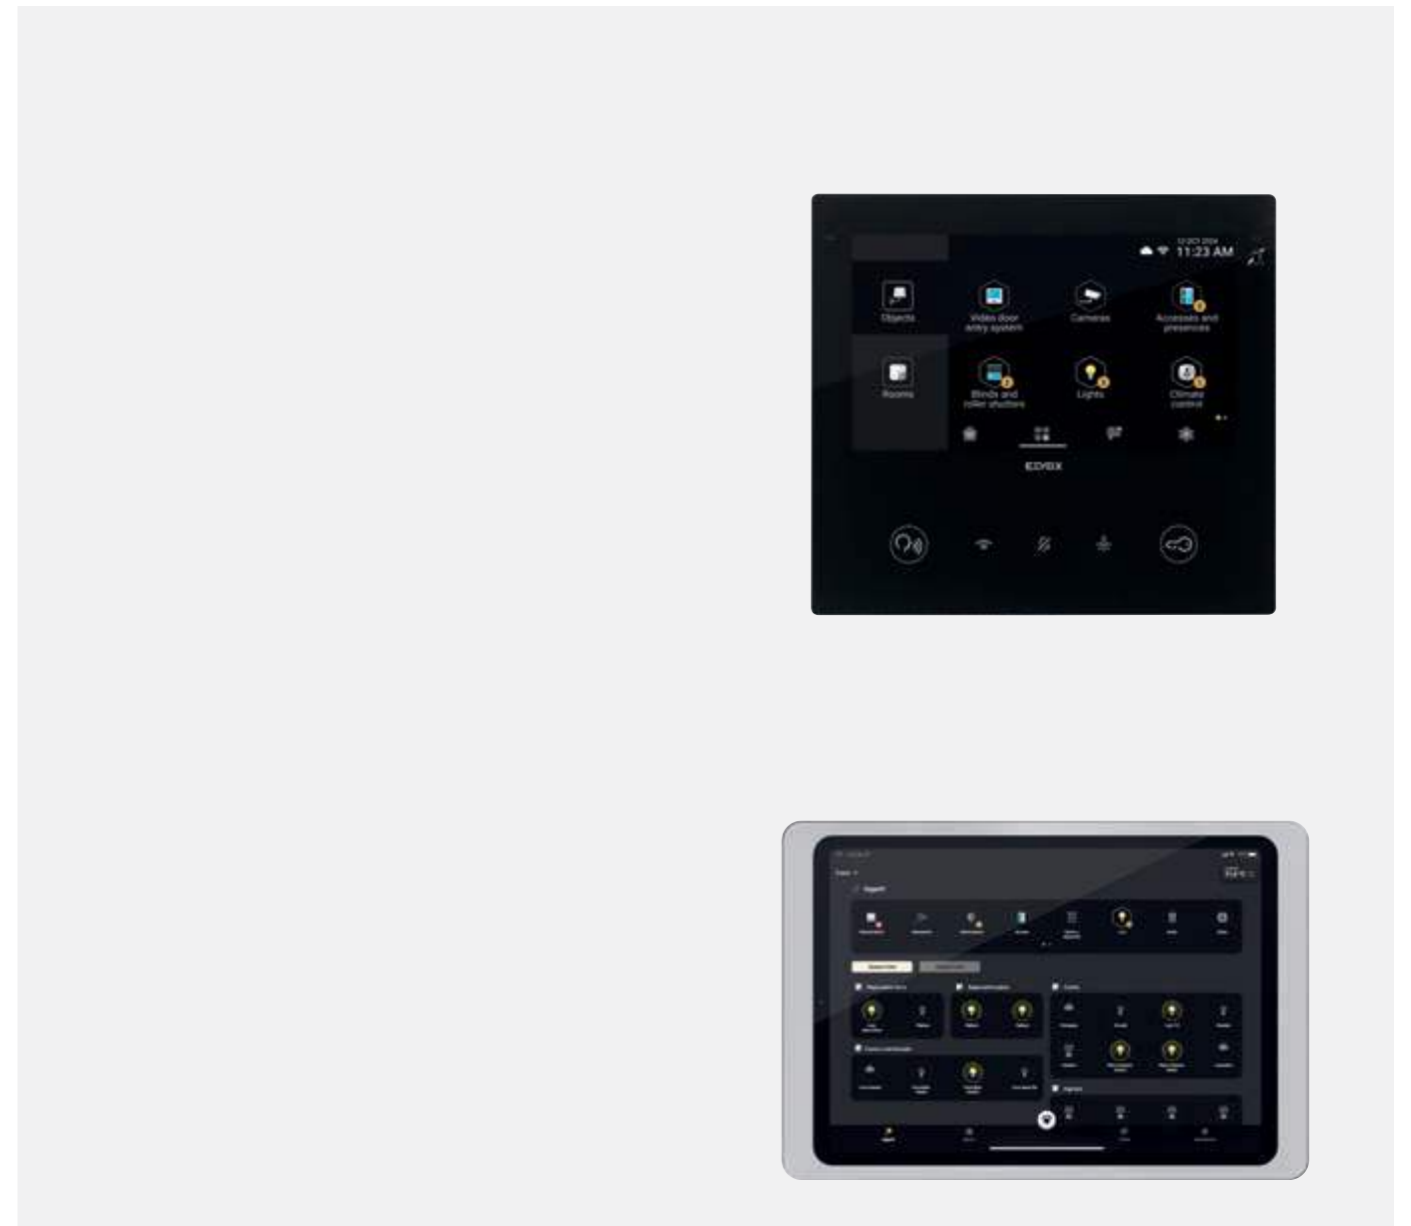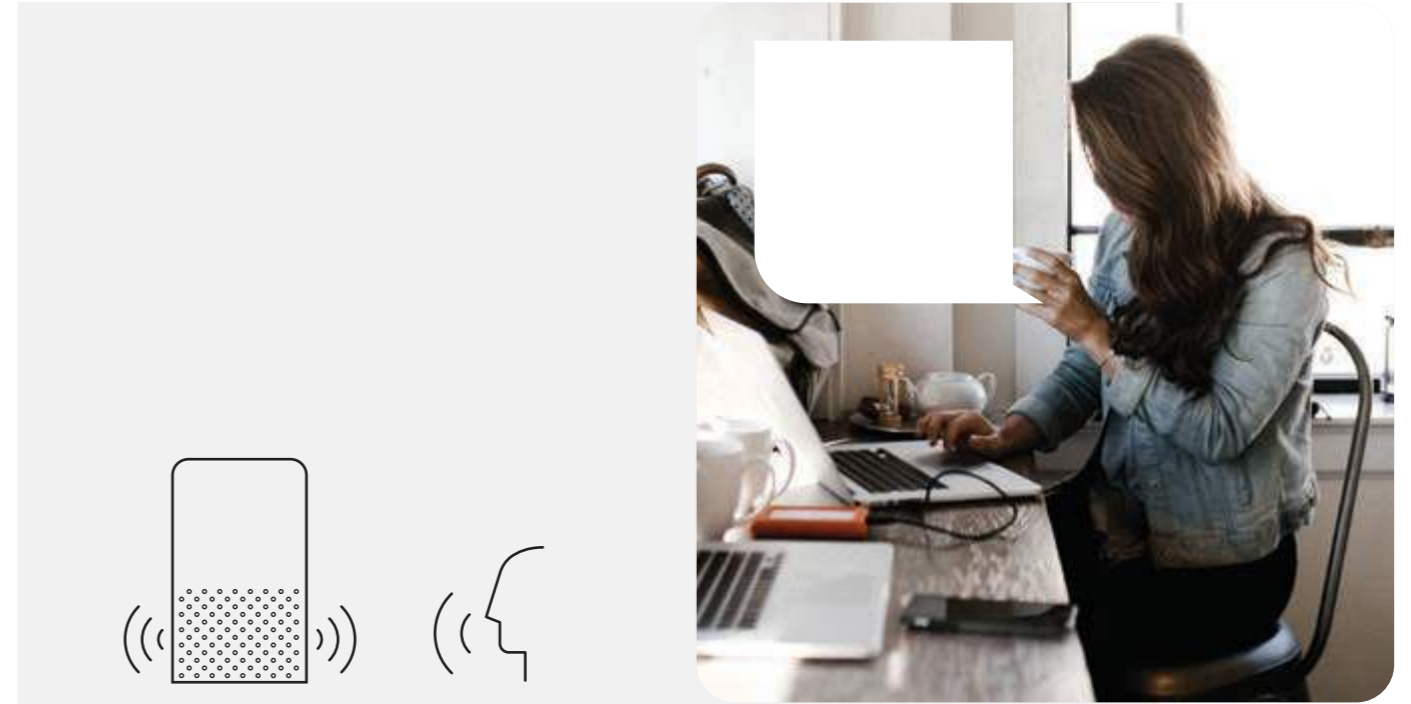





Eikon




Arké

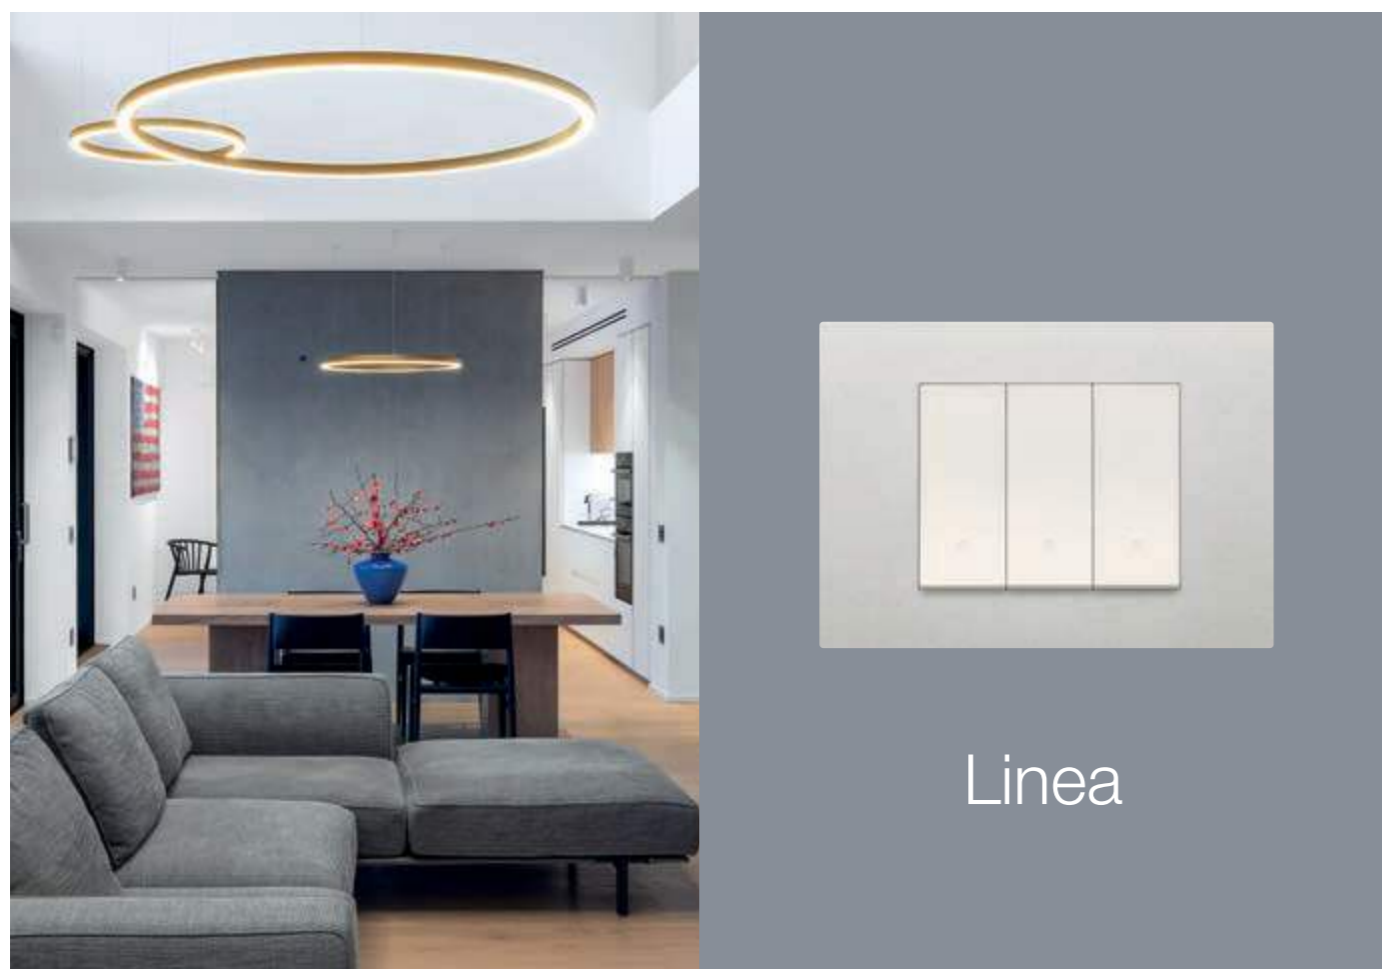

Linea


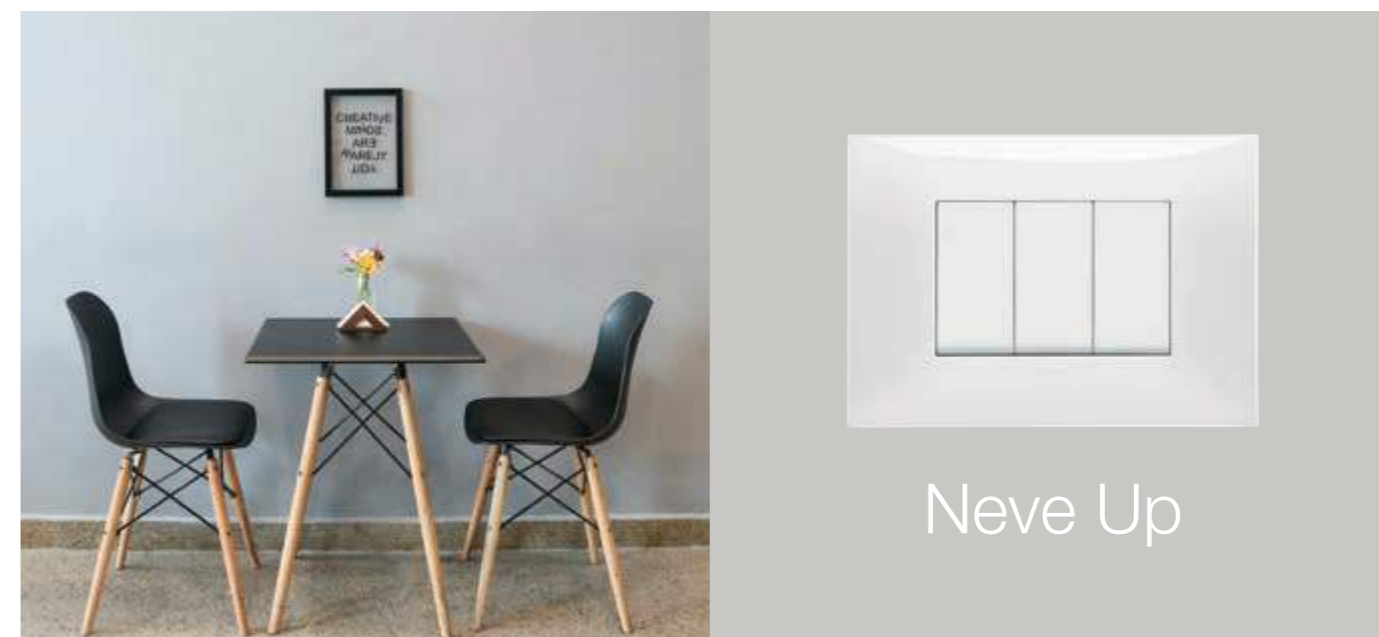


Neve Up

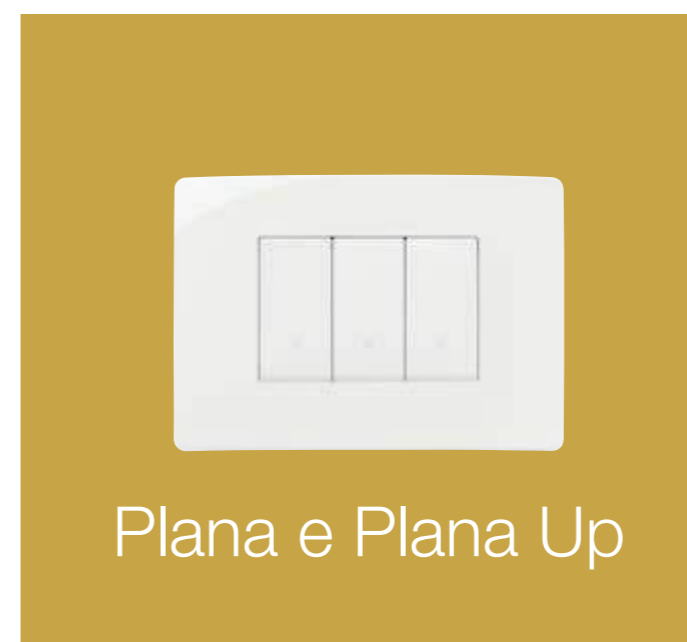



Plana e Plana Up

 Bluetooth®

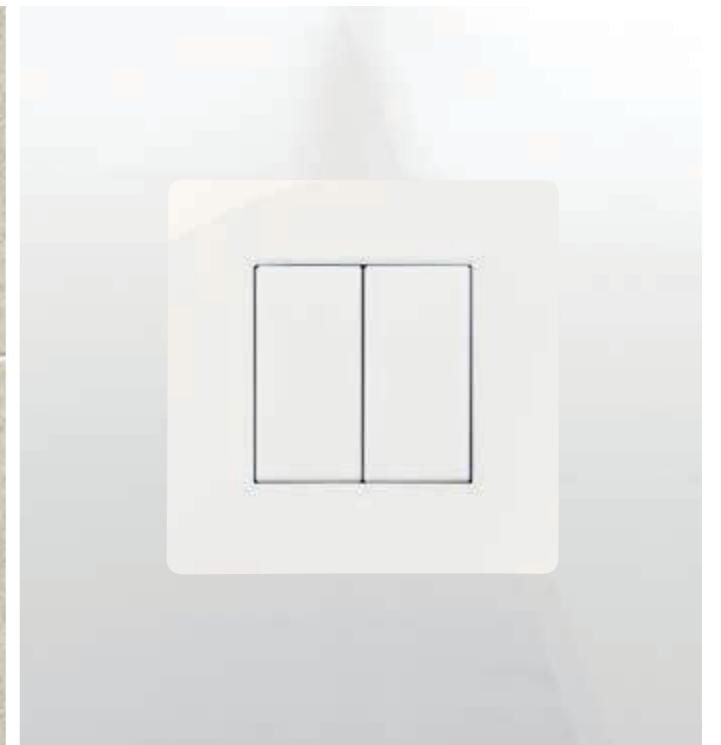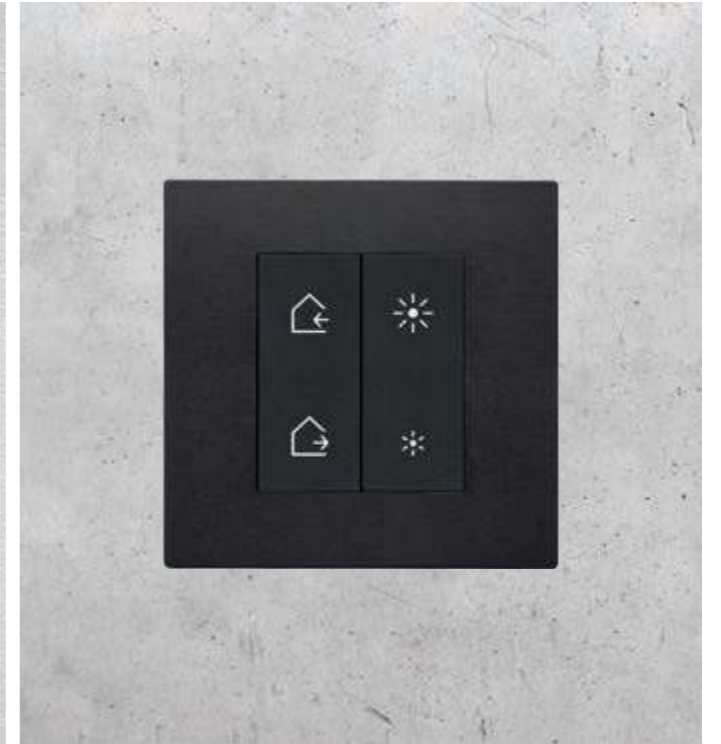



Attention to detail
to give rise to bespoke projects.

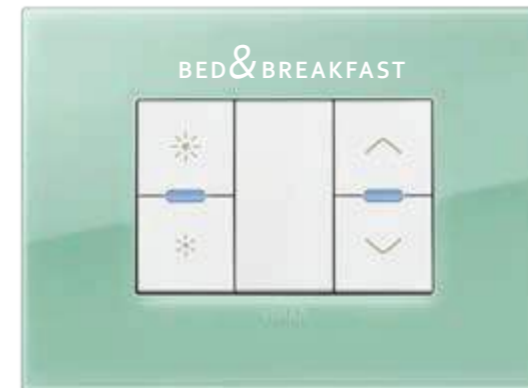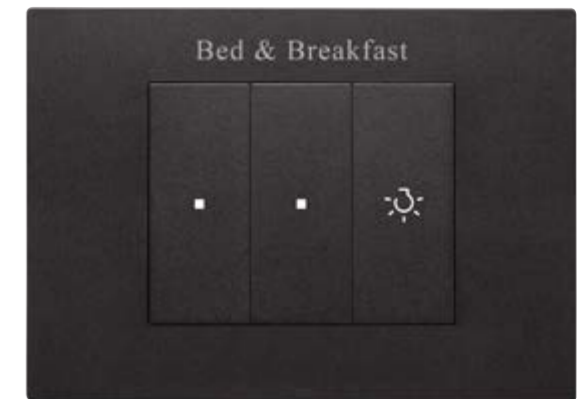

The View Wireless App **can be used to set the LED** backlighting, customising it both in terms of colours from the RGB range as well as brightness on 4 different levels.



View Wireless

Index

TYPICAL SYSTEMS

from page 22

DEVICES


from page 26

Connected system.

The **Bluetooth® wireless technology** standard makes it possible to use devices in a mesh network, whereby the gateway is designed to allow the user **to control** the system **via the View App** both locally and remotely. Moreover, the system can also be controlled using Amazon Alexa, Google Assistant and Siri smart speakers and scenarios can be activated with the Tab 5S Up and Tab 7S Up video entryphones. The installer **configures** the system and sets all the parameters **using the View Wireless App**, which also allows the addition of battery-free remote controls, for the activation of scenarios or the addition of other control devices.

Representation of a residential system with connected devices to control lights, roller shutter, temperature, energy management and access control. Up to 64 devices can be connected, and up to 16 favourite scenarios can be set. Radio frequency devices can also be added to the system.


CONTROLLING LIGHTS, ROLLER SHUTTERS AND SCENARIOS

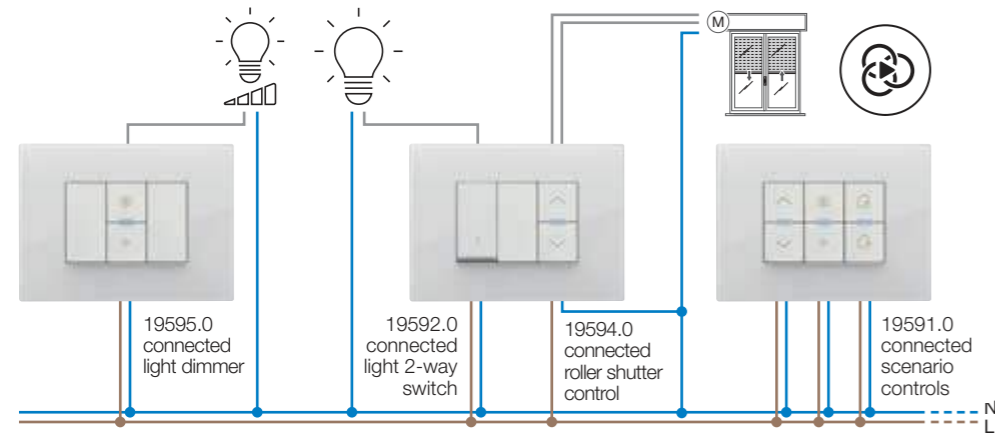


INTEGRATION WITH BATTERY-FREE RADIO CONTROLS



TEMPERATURE CONTROL

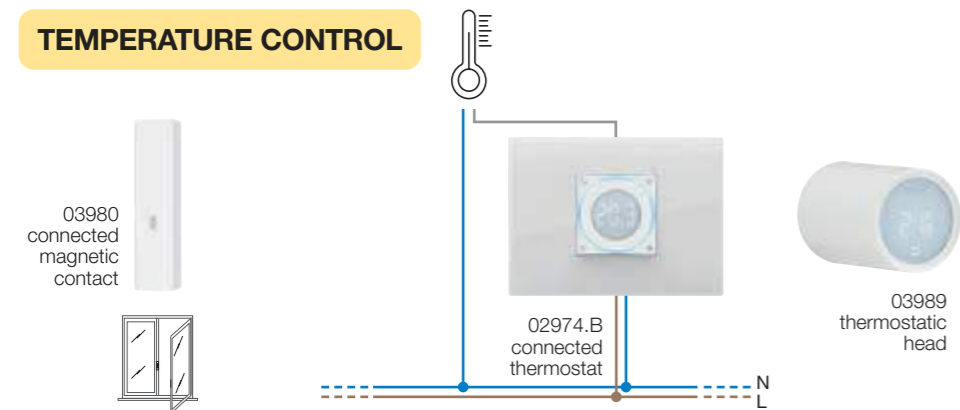

CONNECTED ACTUATORS



VOCAL AND LOCAL CONTROL




SUPERVISION





The wiring of connected devices requires a power supply (L, N) and connection to the related loads and/or electro-mechanical control devices (2-way switches, 1-way switches, push buttons). The presence of Wi-Fi Internet connection is always required, to allow the connection to the Cloud for supervision (local and remote) and for integrations with the Alexa, Google Assistant and Siri smart speakers. In addition, the system is compatible with IFTTT. By integrating IFTTT compatible third-party devices, recipes/applets can be created, involving climate control, the use of periodic timers, astronomical clocks, the weather and information about energy production or consumption. For instance, on reaching a specific internal temperature, you can turn on the air conditioning using a third-party interface, or turn on a light at sunset.



ENERGY MANAGEMENT

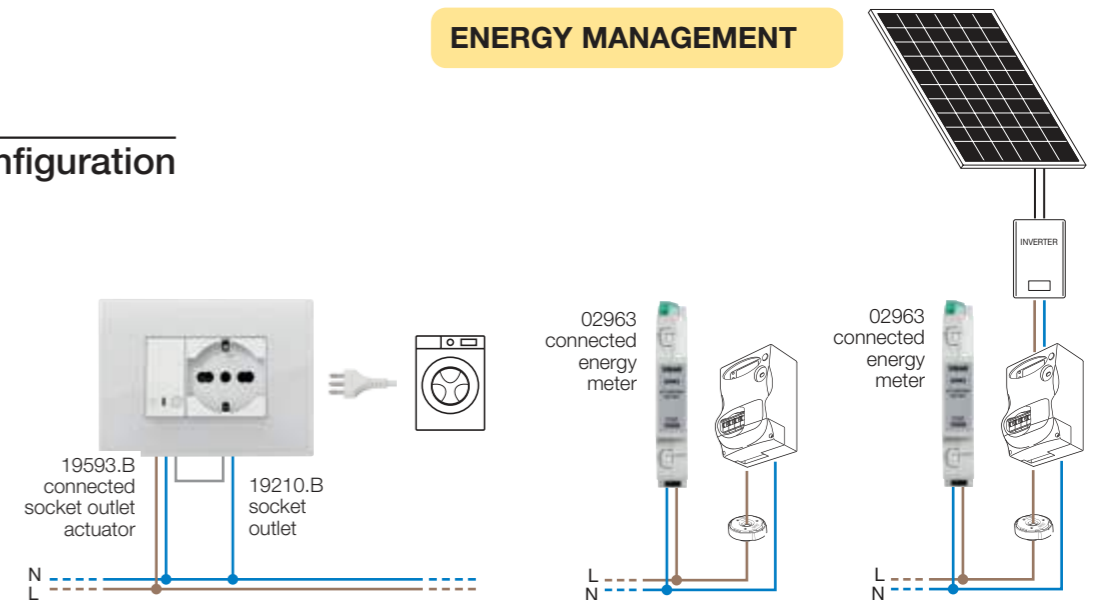


ACCESS CONTROL

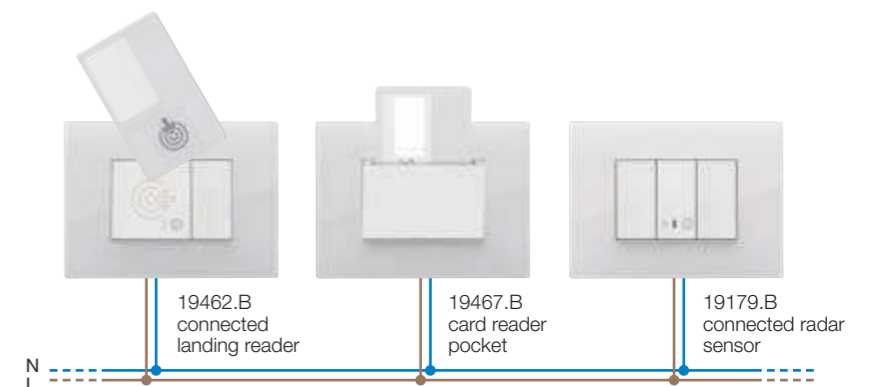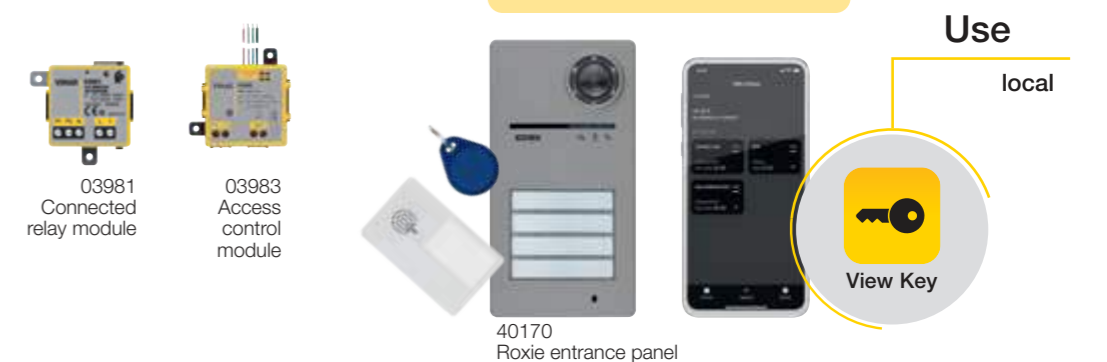

Connected system based on App and Vimar cloud.

Connected system to control lights, roller shutters, temperature and energy management with flush mounting Wi-Fi gateway, supervision with **Vimar View** App and integration with radio frequency control with Bluetooth® Low Energy battery-free standard. Complete control with Siri, Amazon Alexa and Google Home through the Vimar Cloud and simplified configuration with the **View Wireless** App.

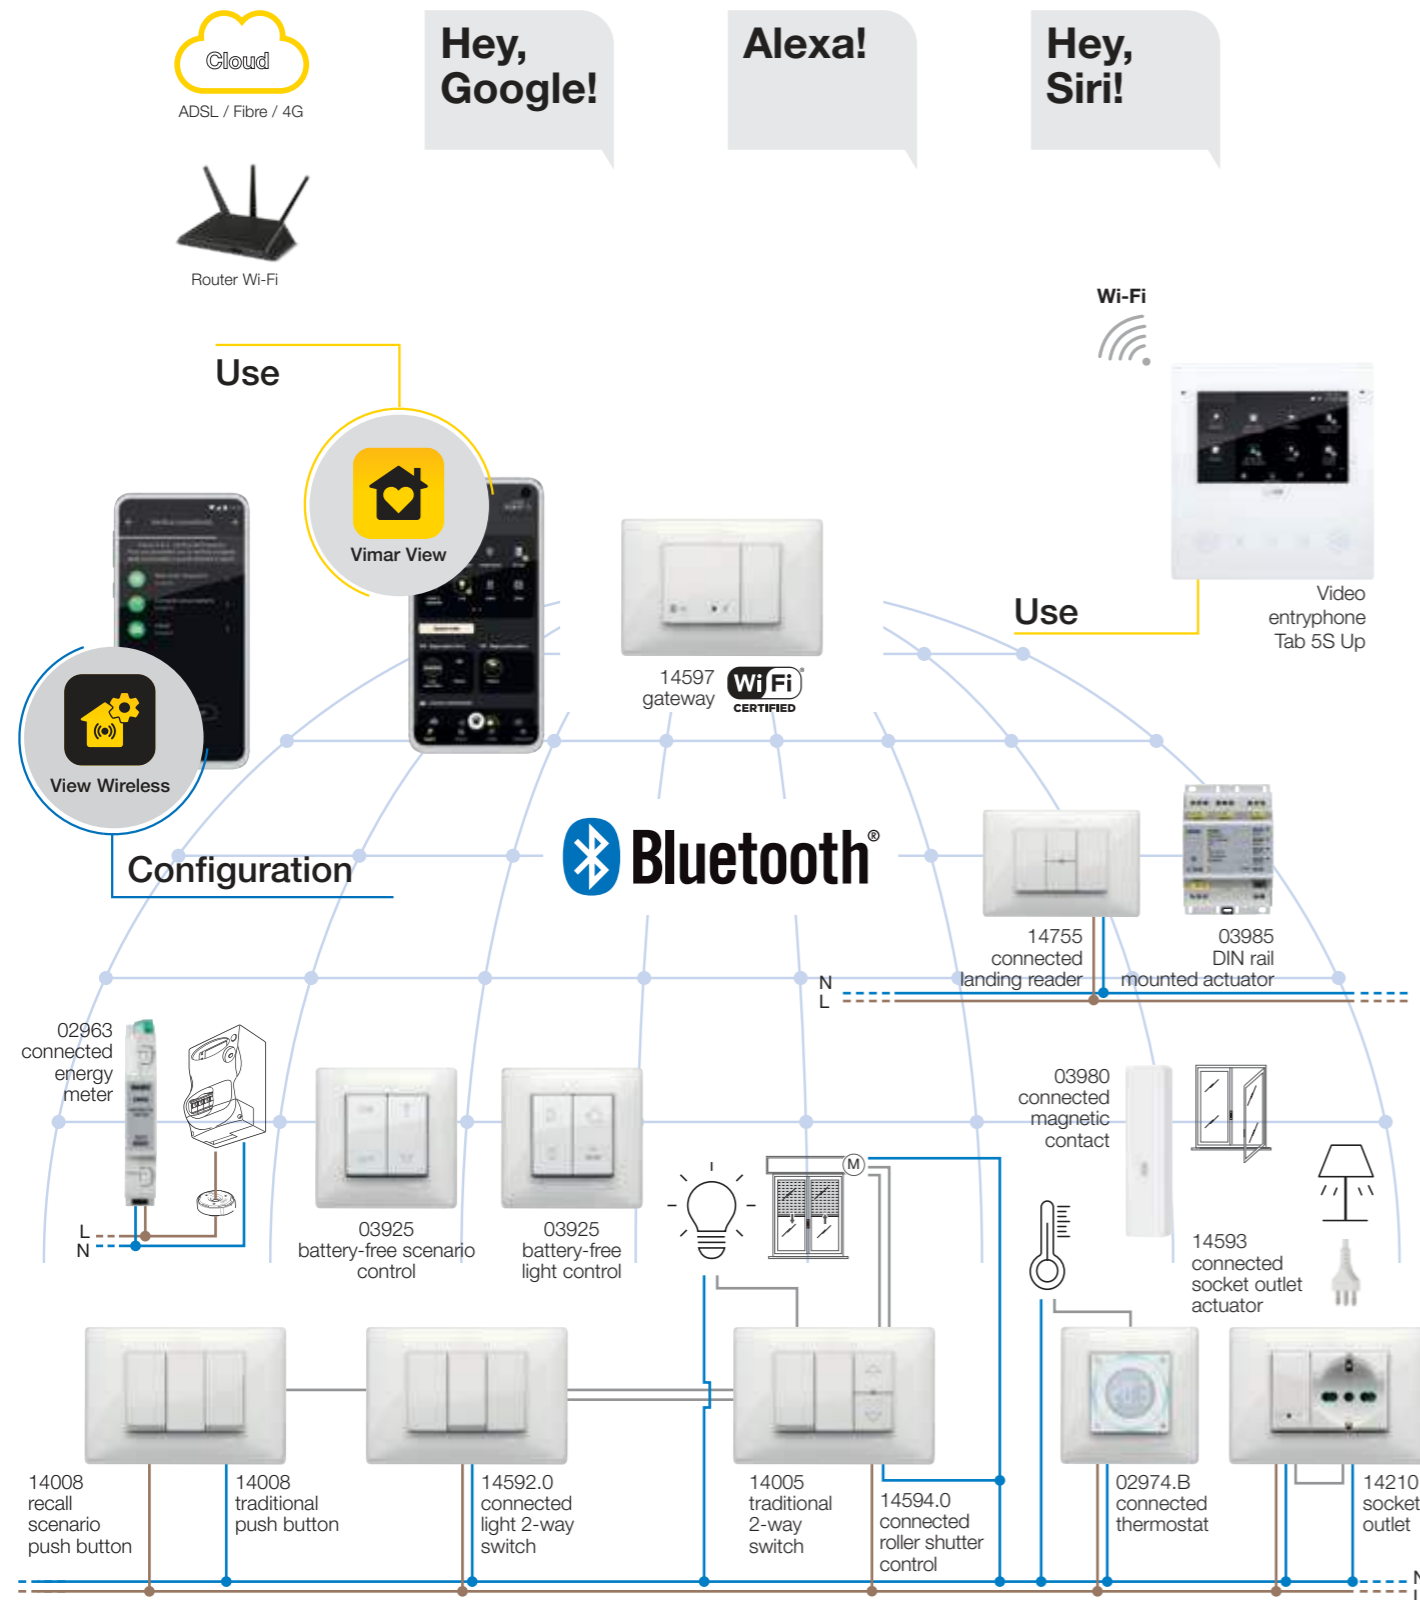


Integration of the connected products in a smart ecosystem based on Zigbee hub, App and third-party cloud.

The **Zigbee technology** standard makes it possible to use devices directly in combination with a third-party Zigbee gateway, such as Amazon Echo or SmartThings Hub.

The **View Wireless** App is only required to upload the Zigbee 3.0 protocol onto each individual connected device, guaranteeing use in a Smart Home without requiring additional gateways (the network HUB is Alexa or Samsung).

The wiring of connected devices requires a power supply (L, N) and connection to the related loads and/or electro-mechanical control devices (2-way switches, 1-way switches, push buttons). The presence of Wi-Fi Internet connection is always required, to allow the connection to the Cloud for supervision (local and remote) and for integration with the voice controls.

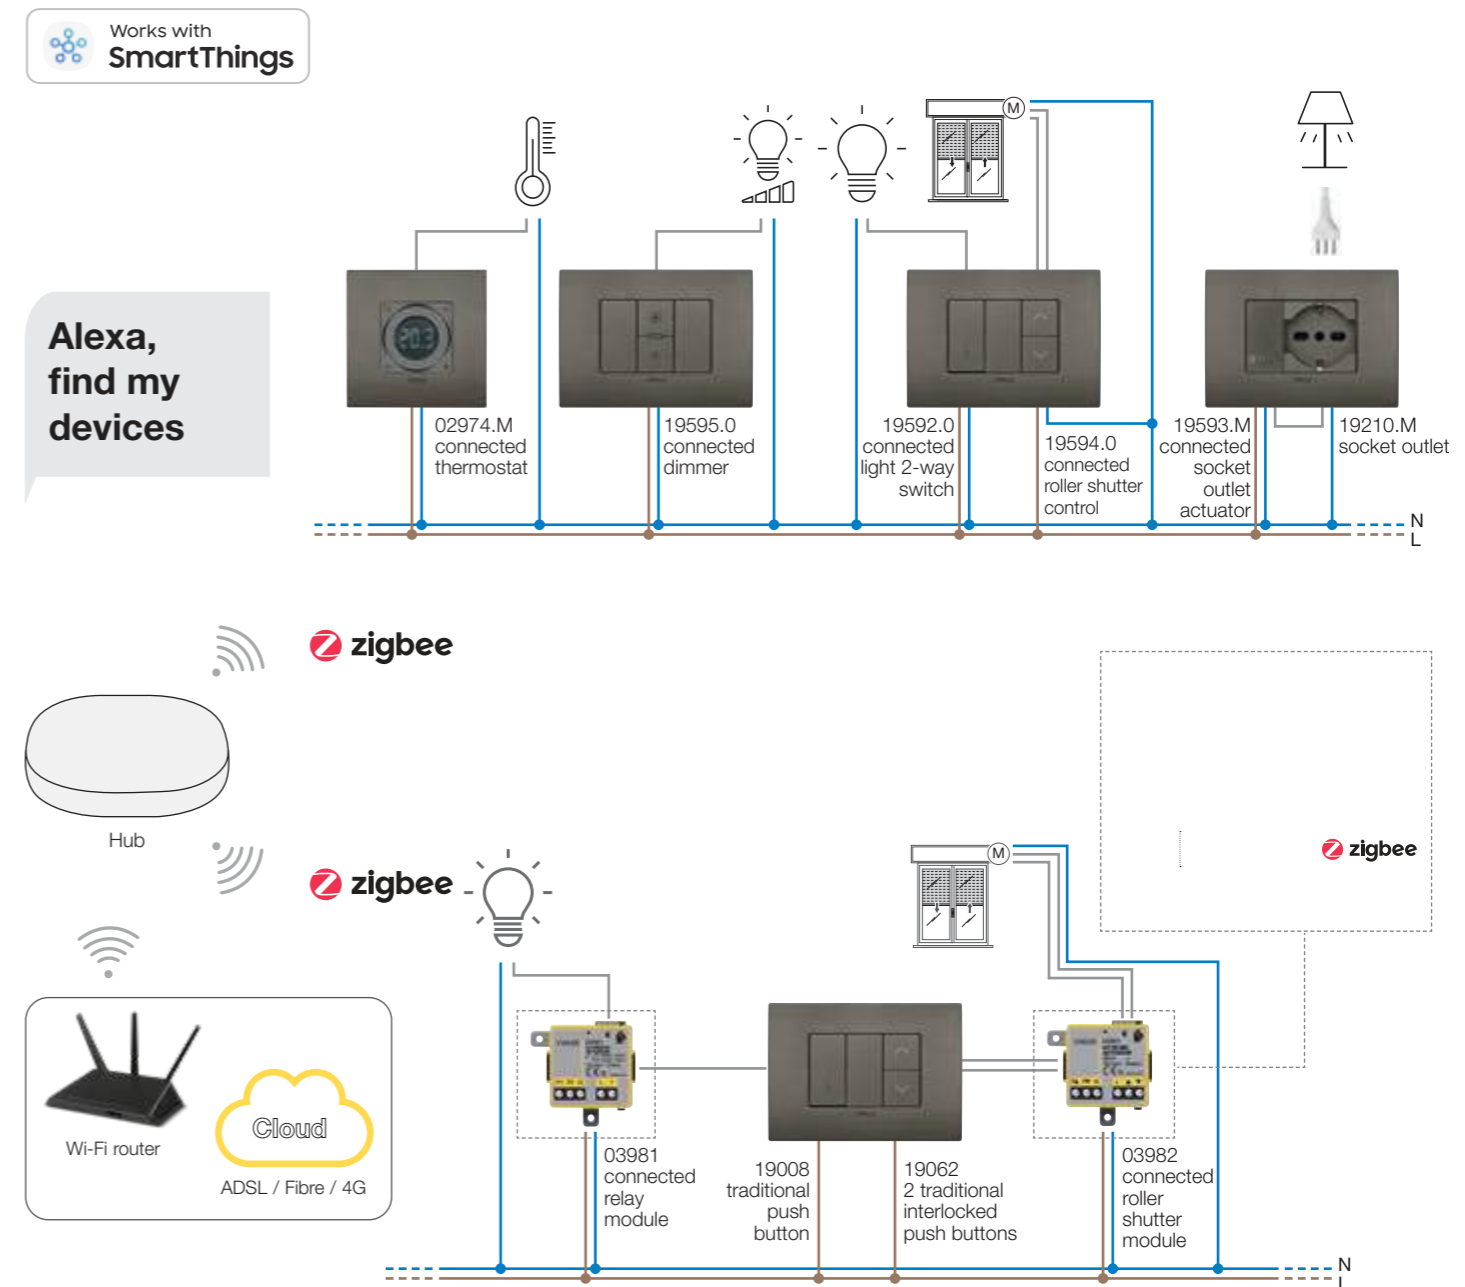


VIEW WIRELESS

Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

Supervision



40515
Wall-mounted Tab 5S Up hands-free video entryphone for Due Fili Plus system, integrated Wi-Fi for call forwarding to smartphone with dedicated App, with 5" touch-screen colour LCD display, capacitive keyboard for video door entry functions and intercom calls, video voicemail, teleloop for hearing aids, supervision of the View Wireless smart home automation system to control lights, roller shutters, sensors and scenarios, complete with bracket for fixing in round or rectangular mounting box, surface mounting or semi-flush mounting, white



40515.04
Same as previous, black



40517
Wall-mounted Tab 7S Up hands-free video entryphone for Due Fili Plus system, integrated Wi-Fi for call forwarding to smartphone with dedicated App, with 7" touch-screen colour LCD display, capacitive keyboard for video door entry functions and intercom calls, video voicemail, teleloop for hearing aids, supervision of the View Wireless smart home automation system to control lights, roller shutters, sensors and scenarios, complete with bracket for fixing in round or rectangular mounting box, surface mounting or semi-flush mounting, white



40517.04
Same as previous, black



6923
Power supply unit for Tab video entryphones with 28 V D.C. output, power supply 230 V- 50/60 Hz 15 VA, installation on DIN rail (60715 TH35), occupies 4 modules size 17.5 mm



With the **Vimar View** app (for the user) and the **View Wireless** app (for the installer) available on the Apple and Google Play stores.


Mounting frames for iPads



01430
Mounting frame for 10.9-11" iPad devices, comprising a decorative frame with surface mounting frame with wall plugs, supplied with type C USB cable and no power supply unit, black



01430.B
Same as previous, white



01430.N
Same as previous, Next

Gateway with mounting frame for Neve Up



0K14597.01
Wi-Fi Bluetooth® wireless technology gateway for integration, configuration and supervision of View Wireless system by Cloud and app for smartphone and tablet, 100-240 V 50/60 Hz power supply, on DIN (60715 TH35) rail installation, occupies 2 17,5 mm modules



VIEW WIRELESS

Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

Gateway



20597
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, grey - 2 modules. Depth: 37 mm



30807.G
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, black - 2 modules. Depth: 38.8 mm



19597
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, grey - 2 modules. Depth: 36.7 mm



14597
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 36 mm



09597
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 37.2 mm



20597.B
As above, white



30807.B
As above, white



19597.B
As above, white



09597.CM
As above, Carbon Matt



20597.N
As above, Next



30807.C
As above, canvas



19597.M
As above, Metal

Connected 2-way switches



20592.0
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons. Depth: 37.5 mm



30802
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1-module interchangeable buttons. Depth: 33.8 mm



19592.0
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons. Depth: 36.5 mm



14592.0
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons. Depth: 36.5 mm



09592
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, white. Depth: 37.9 mm



09592.CM
As above, Carbon Matt

Neve Up connected 2-module 2-way switches



09592.2
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, white. Depth: 37.9 mm



09592.2.CM
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, Carbon Matt. Depth: 37.9 mm

VIEW WIRELESS

Connected devices



EIKON

1-module interchangeable buttons for connected 2-way switch (lightable)



2-module interchangeable buttons for connected 2-way switch (lightable)



3-module interchangeable buttons for connected 2-way switch (lightable)




VIEW WIRELESS

Connected devices



LINEA

Aligned 1-module interchangeable buttons for connected 2-way switch (lightable)

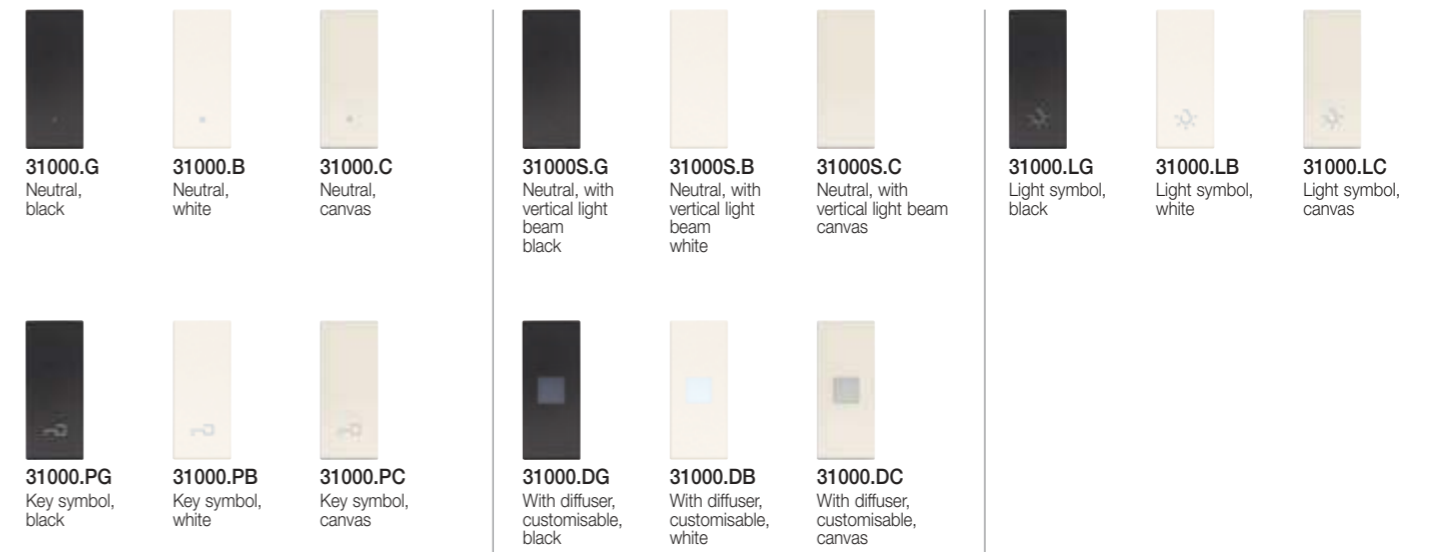

Axial 1-module interchangeable buttons for connected 2-way switch (lightable)



VIEW WIRELESS

Connected devices



ARKÉ

1-module interchangeable buttons for connected 2-way switch (lightable)



2-module interchangeable buttons for connected 2-way switch (lightable)



3-module interchangeable buttons for connected 2-way switch (lightable)



VIEW WIRELESS

Connected devices



PLANA

1-module interchangeable buttons for connected 2-way switch (lightable)



2-module interchangeable buttons for connected 2-way switch (lightable)



3-module interchangeable buttons for connected 2-way switch (lightable)



VIEW WIRELESS






Connected devices













EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

Connected controls for roller shutters



 <p>20594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.5 mm</p>	 <p>30804 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 33.8 mm</p>	 <p>19594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p>14594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p>09594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.9 mm</p>
--	---	---	---	---

1-module interchangeable buttons and half-button caps for connected controls

 <p>20755.2 Arrows symbol, grey</p>	 <p>31000A.FG Arrows symbol, black</p>	 <p>19755.2 Arrows symbol, grey</p>	 <p>14755.2 Arrows symbol, white</p>	 <p>09755.2 Arrows symbol, white</p>
 <p>20755.2.B Arrows symbol, white</p>	 <p>31000A.FB Arrows symbol, white</p>	 <p>19755.2.B Arrows symbol, white</p>	 <p>09755.2.SL Arrows symbol, Carbon Matt</p>	
 <p>20755.2.N Arrows symbol, Next</p>	 <p>31000A.FC Arrows symbol, canvas</p>	 <p>19755.2.M Arrows symbol, Metal</p>		

VIEW WIRELESS







Connected devices















EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

Connected dimmers



 <p>20595.0 Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.5 mm</p>	 <p>30805 Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable buttons. Depth: 39 mm</p>	 <p>19595.0 Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p>14595.0 Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p>09595.0 Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm</p>
				 <p>09595.0.120 Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm</p>

1-module interchangeable buttons and half-button caps for connected dimmers

 <p>20755.3 Dimmer symbol, grey</p>	 <p>31000A.RG Dimmer symbols, black</p>	 <p>19755.3 Dimmer symbol, grey</p>	 <p>14755.3 Dimmer symbol, white</p>	 <p>14755.3 Dimmer symbol, white</p>
 <p>20755.3.B Dimmer symbol, white</p>	 <p>31000A.RB Dimmer symbols, white</p>	 <p>19755.3.B Dimmer symbol, white</p>		 <p>14755.3.CM Dimmer symbol, Carbon Matt</p>
 <p>20755.3.N Dimmer symbol, Next</p>	 <p>31000A.RC Dimmer symbols, canvas</p>	 <p>19755.3.M Dimmer symbol, Metal</p>		

VIEW WIRELESS






Connected devices















EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

Connected electronic controls



 <p>20591.0 Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 37.5 mm</p>	 <p>30801 Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with 1-module interchangeable buttons. Depth: 33.8 mm</p>	 <p>19591.0 Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p>14591.0 Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p>09591.0 Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm</p>
---	---	--	--	--

1-module interchangeable buttons and half-button caps for connected electronic controls

 <p>20755 Neutral, grey</p>	 <p>31000A.G Neutral, black</p>	 <p>19755 Neutral, grey</p>	 <p>14755 Neutral, white</p>	 <p>09755 Neutral, white</p>
 <p>20755.B Neutral, white</p>	 <p>31000A.B Neutral, white</p>	 <p>19755.B Neutral, white</p>		 <p>09755.CM Neutral, Carbon Matt</p>
 <p>20755.N Neutral, Next</p>	 <p>31000A.C Neutral, canvas</p>	 <p>19755.M Neutral, Metal</p>		

























VIEW WIRELESS

Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

1-module interchangeable buttons and half-button caps for connected electronic controls

 <p>20755.2 Arrows symbol, grey</p>	 <p>31000A.FG Arrows symbol, black</p>	 <p>19755.2 Arrows symbol, grey</p>	 <p>14755.2 Arrows symbol, white</p>	 <p>09755.2 Arrows symbol, white</p>
 <p>20755.2.B Arrows symbol, white</p>	 <p>31000A.FB Arrows symbol, white</p>	 <p>19755.2.B Arrows symbol, white</p>		 <p>09755.2.CM Arrows symbol, Carbon Matt</p>
 <p>20755.2.N Arrows symbol, Next</p>	 <p>31000A.FC Arrows symbol, canvas</p>	 <p>19755.2.M Arrows symbol, Metal</p>		
 <p>20755.3 Dimmer symbol, grey</p>	 <p>31000A.RG Dimmer symbols, black</p>	 <p>19755.3 Dimmer symbol, grey</p>	 <p>14755.3 Dimmer symbol, white</p>	 <p>09755.3 Dimmer symbol, white</p>
 <p>20755.3.B Dimmer symbol, white</p>	 <p>31000A.RB Dimmer symbols, white</p>	 <p>19755.3.B Dimmer symbol, white</p>		 <p>09755.3.CM Dimmer symbol, Carbon Matt</p>
 <p>20755.3.N Dimmer symbol, Next</p>	 <p>31000A.RC Dimmer symbols, canvas</p>	 <p>19755.3.B Dimmer symbol, Metal</p>		

VIEW WIRELESS

Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

1-module interchangeable buttons and half-button caps for connected electronic controls



20755.6
Scenarios symbol, grey



31000A.SG
Scenarios symbols, black



19755.6
Scenarios symbol, grey



14755.6
Scenarios symbol, white



09755.6
Scenarios symbol, white



20755.6.B
Scenarios symbol, white



31000A.SB
Scenarios symbols, white



19755.6.B
Scenarios symbol, white



09755.6.CM
Scenarios symbol, Carbon Matt



20755.6.N
Scenarios symbol, Next



31000A.SC
Scenarios symbols, canvas



19755.6.M
Scenarios symbol, Metal

VIEW WIRELESS

Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

Radio frequency control



03925
Flat control with 4 push buttons, RF transmitter, 2.4 GHz, Bluetooth® Low Energy wireless technology standard, energy harvesting power supply provided by built-in electro-dynamic generator, to be completed with Eikon 20506 or 20506.2, Arké 19506 and 19506.2, Idea 16526 or 16526.2, Plana 14506 or 14506.2 buttons - 2 modules

Connected socket outlet actuators



20593
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, grey. Depth: 39.5 mm



30803.G
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, black. Depth: 42.8 mm



19593
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, grey. Depth: 39 mm



14593
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white. Depth: 38.5 mm



09593
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white. Depth: 40 mm



20593.B
As above, white



30803.B
As above, white



19593.B
As above, white



14593.B
As above, white



09593.CM
As above, Carbon Matt



20593.N
As above, Next



30803.C
As above, canvas



19593.M
As above, Metal

VIEW WIRELESS

Connected devices



EIKON LINEA ARKÉ PLANA NEVE UP

Connected retrofit actuator



03981
Control device, with NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)



03982
Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)

Connected retrofit actuator



03983
Electronic module with 3 programmable digital inputs for potential-free contacts, 1 programmable NO/NC relay output for SELV voltage-free contact, IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system, 100-240 V 50/60 Hz power supply, flush mounting (retrofit)

DIN rail mounted actuators



03985
Electronic control actuator with 4 relay outputs 16 A 240 V~, programmable NO/NC with function to control lights, roller shutters with slat orientation, fan coil, climate control, accesses, sprinkler system, push buttons for local control, IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system and on Zigbee 3.0 standard, 100-240 V 50/60 Hz power supply, installation on DIN rail (60715 TH35), occupies 4 modules size 17.5 mm



03986
VIEW Wireless electronic control actuator with 1 proportional analogue 0/1-10 V output with re-scalable voltage, 1 10 AX relay output 100-240 V~ 50/60 Hz, programmable NO/NC with function to control lights, fan coil, climate control, accesses, sprinkler system, push button for local control, IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system and on Zigbee 3.0 standard, 100-240 V 50/60 Hz power supply, installation on DIN rail (60715 TH35), occupies 2 modules size 17.5 mm

VIEW WIRELESS

Connected devices



EIKON LINEA ARKÉ PLANA NEVE UP

Connected thermostats



▲02974
Dial thermostat with relay output NO 5(2) A 240 V~, 3-speed and proportional fan coil control, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply - 2 modules. To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723. Depth: 28.5 mm



▲02974.B
Same as previous, white



▲02974.N
Same as previous, Next



▲02974.M
Same as previous, Metal



▲30811.G
Dial thermostat with relay output NO 5(2) A 240 V~, 3-speed and proportional fan coil control, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 31.8 mm



▲30811.B
Same as previous, white



▲30811.C
Same as previous, canvas



▲09474
Dial thermostat with relay output NO 5(2) A 240 V~, 3-speed and proportional fan coil control, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 28.5 mm



▲09474.CM
Same as previous, Carbon Matt

VIEW WIRELESS

Connected devices



EIKON LINEA ARKÉ PLANA NEVE UP

Connected energy meter



02963
Device for consumption meter/production of instantaneous electricity and consumption logs (with hourly, daily, monthly, annual resolution), 1 input for toroidal current sensor supplied, detectable power 25 W-100 kW, single-phase power supply 100-240 V 50/60 Hz, Bluetooth® wireless technology for View Wireless mesh system, occupies 1 module measuring 17.5 mm

Connected magnetic contact



03980
Magnetic contact for doors and windows, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for voltage-free contact, powered by AA LR6 1.5 V batteries (not supplied), white. For use as an accessory of the connected thermostat or, in combination with the IoT gateway, as a sensor for magnetic contact or voltage-free contact input opening/closing notifications

Connected thermostatic head



▲ **03989**
Thermostatic head, IoT technology, Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, heating in PI mode, class IV temperature control device (contribution 2%), display with white LED backlighting, AA alkaline batteries (not rechargeable), installation on radiators equipped with flow control valves. Mechanical adaptors supplied for compatibility with the main valves: RA Danfoss, RAV Danfoss, RAVL, Danfoss, Giacomini, Caleffi, M28x1.5, FAR.

VIEW WIRELESS

Connected devices



EIKON LINEA ARKÉ PLANA NEVE UP

Connected radar sensors



20179
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, grey. Depth: 40 mm



30179.G
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, black. Depth: 43.3 mm



19179
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, grey. Depth: 39.5 mm



14179
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 39 mm



09179
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 39.9 mm



20179.B
As above, white



30179.B
As above, white



19179.B
As above, white



09179.CM
As above, Carbon Matt



20179.N
As above, Next



30179.C
As above, canvas



19179.M
As above, Metal

Connected radar sensors



02692
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation



02692.S.1
Round section adaptor for ceiling installation of the IoT connected radar sensor 02692

























VIEW WIRELESS

Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

Connected access control

 20462 NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, grey - 2 modules. Depth: 32 mm	 30812.G NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, black - 2 modules. Depth: 33.8 mm	 19462 NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, grey - 2 modules. Depth: 31.7 mm	 14462 NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules. Depth: 31 mm	 09462 NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules. Depth: 32.5 mm
 20462.B As above, white	 30812.B As above, white	 19462.B As above, white		 09462.CM As above, Carbon Matt
 20462.N As above, Next	 30812.C As above, canvas	 19462.M As above, Metal		
 20467 NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, grey - 2 modules. Depth: 31 mm	 30813.G NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, black - 2 modules. Depth: 34.3 mm	 19467 NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, grey - 2 modules. Depth: 31 mm	 14467 NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules. Depth: 31 mm	 09467 NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules. Depth: 32.5 mm
 20467.B As above, white	 30813.B As above, white	 19467.B As above, white		 09467.CM As above, Carbon Matt
 20467.N As above, Next	 30813.C As above, canvas	 19467.M As above, Metal		

*Not for use in European countries ▲ New article Δ Available while stocks last











VIEW WIRELESS

Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

Connected access control

 20467.C Card holder cover for NFC/RFID reader pocket and badge switch, grey - 2 modules	 19467.C Card holder cover for NFC/RFID reader pocket and badge switch, grey - 2 modules	 14467.C Card holder cover for NFC/RFID reader pocket and badge switch, white - 2 modules	 09467.C Card holder cover for NFC/RFID reader pocket and badge switch, white - 2 modules
 20467.C.B As above, white	 19467.C.B As above, white		 09467.C.CM As above, Carbon Matt
 20467.C.N As above, Next	 19467.C.M As above, Metal		
 01817 Mifare transponder card			



Energia Positiva. Insieme